

SIDE MINI SWITCHES



BS SERIES

SPECIFICATIONS

Contact Resistance(Initial)

Max. 3Ω

Measured by ohm meter -open voltage<1VDC, driver current -100mA

Insulation Resistance (at 100VDC/minute)

Min. 100MΩ

Operating Temperature range

0°C to 55°C

Vibration

10~55Hz, displacement 0.75mm(p-p)

Electrical Service Life

Min. 200,000 operations.

Electrical Operating Frequency

30 operations per minute

RATING


50mA 30VDC

APPLICATIONS


Mp3 Player, PDA, Digital Camera, Mobile Phone

DIMENSIONS


Unless otherwise specified, a tolerance of $\pm 0.4\text{mm}$ applies to all dimensions.

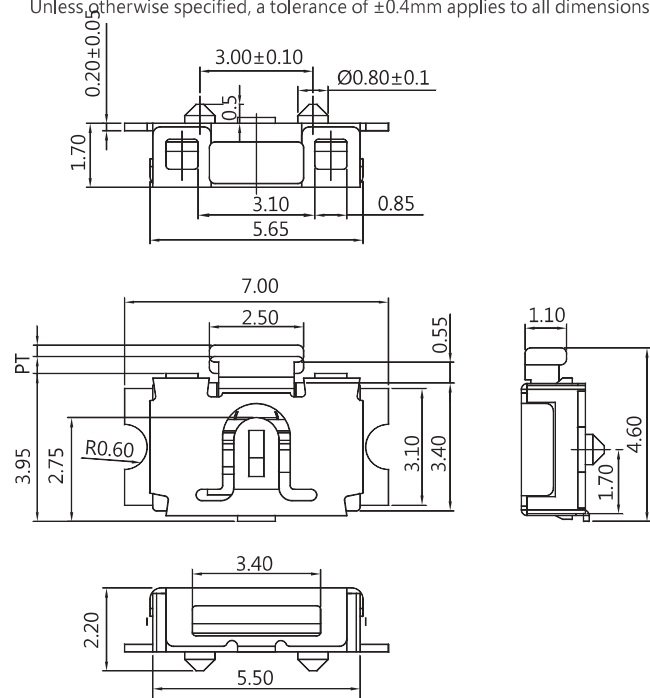

CONTACT CONFIGURATION

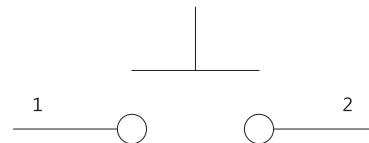

MOUNTING HOLES

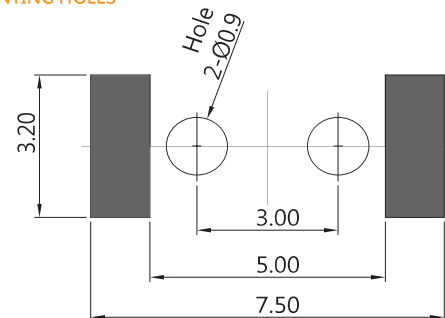

ORDERING INFORMATION

