



T6 SERIES

SPECIFICATIONS

Contact Resistance(initial)

Max. 100 mΩ

Measured by ohm meter - open voltage < 1VDC, driver current -100 mA

Insulation Resistance(at 100 VDC / minute)

Min. 100 MΩ

Operating Temperature Range

-25°C to 70°C (with no icing)

Vibration

10~55 Hz, displacement 0.75 mm(p-p)

Electrical Service Life

Min. 2,000,000 operations

Electrical Operating Frequency

120 operations per minute

RATING



50mA 12VDC

APPLICATIONS


Mouse, Joystick, Notebook

DIMENSIONS

Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

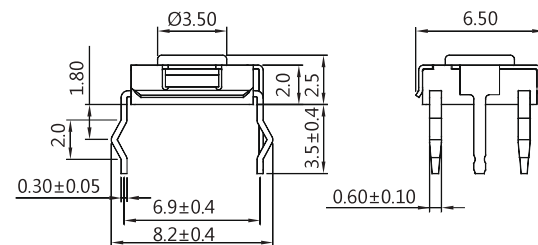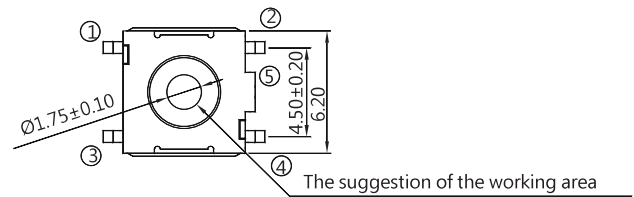


CONTACT CONFIGURATION



MOUNTING HOLES

D TYPE



P TYPE

