


FRX Series

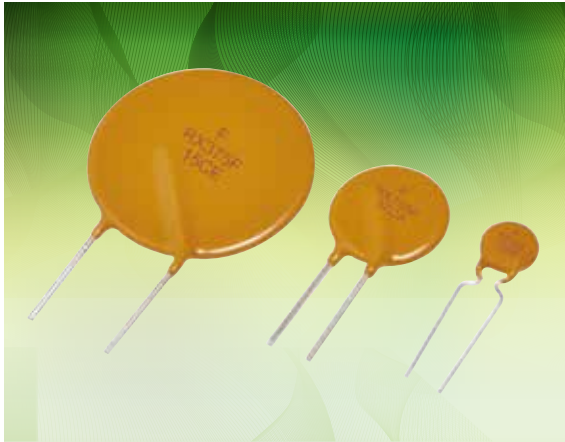

Application

Wide variety of electronic equipment

Product Features

Low hold current, Solid state Radial-leaded product ideal for up to 60V_{DC}



Operation Current

0.05A ~ 3.75A

Maximum Voltage

60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRX005-60F	0.05	0.10	5.0	40	60	0.26	7.30	20.00
FRX010-60F	0.10	0.20	4.0	40	60	0.38	2.50	7.50
FRX017-60F	0.17	0.34	3.0	40	60	0.48	2.00	8.00
FRX020-60F	0.20	0.40	2.2	40	60	0.41	1.83	4.40
FRX025-60F	0.25	0.50	2.5	40	60	0.45	1.25	3.00
FRX030-60F	0.30	0.60	3.0	40	60	0.49	0.88	2.10
FRX040-60F	0.40	0.80	3.8	40	60	0.56	0.55	1.29
FRX050-60F	0.50	1.00	4.0	40	60	0.77	0.50	1.17
FRX065-60F	0.65	1.30	5.3	40	60	0.88	0.31	0.72
FRX075-60F	0.75	1.50	6.3	40	60	0.92	0.25	0.60
FRX090-60F	0.90	1.80	7.2	40	60	0.99	0.20	0.47
FRX110-60F	1.10	2.20	8.2	40	60	1.50	0.15	0.38
FRX135-60F	1.35	2.70	9.6	40	60	1.70	0.12	0.30
FRX160-60F	1.60	3.20	11.4	40	60	1.90	0.09	0.22
FRX185-60F	1.85	3.70	12.6	40	60	2.10	0.08	0.19
FRX250-60F	2.50	5.00	15.6	40	60	2.50	0.05	0.13
FRX300-60F	3.00	6.00	19.8	40	60	2.80	0.04	0.10
FRX375-60F	3.75	7.50	24.0	40	60	3.20	0.03	0.08

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%

Typical Time-To-Trip at 23°C

- A = FRX005-60F
- B = FRX010-60F
- C = FRX017-60F
- D = FRX020-60F
- E = FRX025-60F
- F = FRX030-60F
- G = FRX040-60F
- H = FRX050-60F
- I = FRX065-60F
- J = FRX075-60F
- K = FRX090-60F
- L = FRX110-60F
- M = FRX135-60F
- N = FRX160-60F
- O = FRX185-60F
- P = FRX250-60F
- Q = FRX300-60F
- R = FRX375-60F

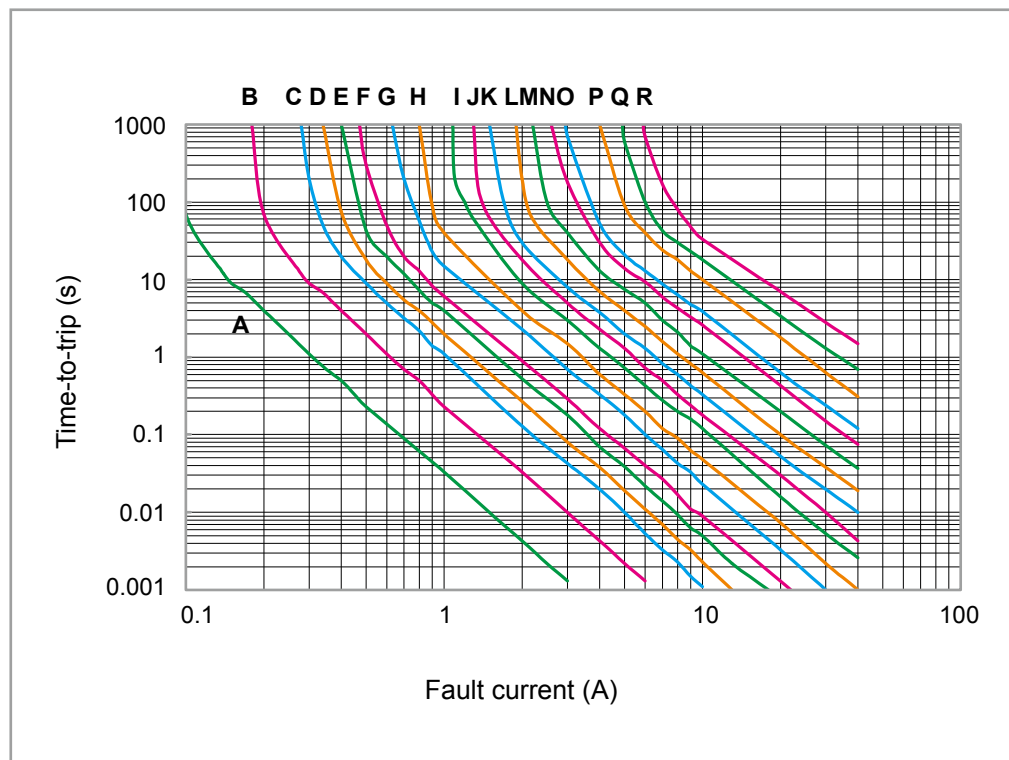

FRX Product Dimensions (mm)




Fig.1
Lead Size : 24AWG
Φ 0.51 mm Diameter





Fig.2
Lead Size : 20AWG
Φ 0.81 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRX005-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX010-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-60F	1	7.4	13.0	5.1	7.6	3.1	1.1
FRX040-60F	1	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-60F	1	7.9	13.7	5.1	7.6	3.1	1.1
FRX065-60F	1	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-60F	1	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-60F	1	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-60F	2	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-60F	2	14.5	19.6	5.1	7.6	3.1	1.4
FRX160-60F	2	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-60F	2	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-60F	2	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-60F	2	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-60F	2	28.5	33.5	10.2	7.6	3.1	1.4


Physical specifications

Lead material : FRX005-60F~FRX090-60F Tin plated copper, 24 AWG.
FRX110-60F~FRX375-60F Tin plated copper, 20 AWG.
Soldering characteristics : MIL-STD-202, Method 208E.
Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

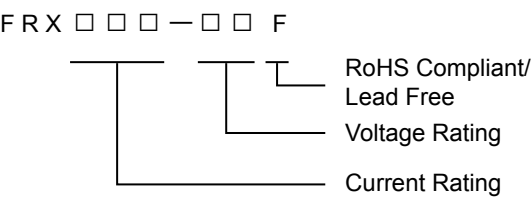

Part Marking System

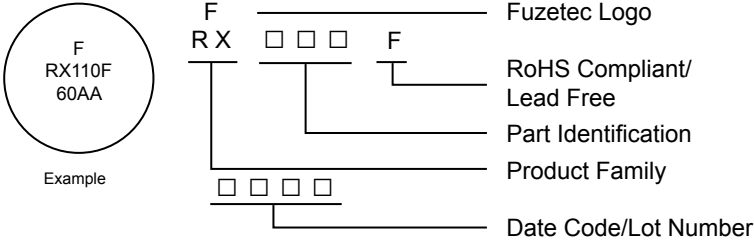

Package Information

Part Number	Standard Package
FRX005-60F~FRX050-60F	: 500 Pcs/Bag, 3.0K Reel/Tape
FRX065-60F~FRX090-60F	: 300 Pcs/Bag, 3.0K Reel/Tape
FRX110-60F	: 300 Pcs/Bag, 1.5K Reel/Tape
FRX135-60F~FRX185-60F	: 200 Pcs/Bag, 1.5K Reel/Tape
FRX250-60F~FRX375-60F	: 100 Pcs/Bag, 1.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRX90V Series



Application

Telecom & wide variety of electronic equipment

Product Features

Low hold current, Solid state, Radial leaded product ideal for up to 90V_{DC}



Operation Current

0.10A~3.75A

Maximum Voltage

Up to 90V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRX010-90F	0.10	0.20	4.0	40	72/90	0.38	2.50	7.50
FRX015-90F	0.15	0.35	10.0	40	72/90	0.70	2.40	7.00
FRX017-90F	0.17	0.34	3.0	40	72/90	0.48	2.00	8.00
FRX020-90F	0.20	0.40	2.2	40	72/90	0.41	1.83	4.40
FRX025-90F	0.25	0.50	2.5	40	72/90	0.45	1.25	3.00
FRX030-90F	0.30	0.60	3.0	40	72/90	0.49	0.88	2.10
FRX035-90F	0.35	0.75	10.0	40	72/90	1.30	0.70	2.50
FRX040-90F	0.40	0.80	3.8	40	72/90	0.56	0.55	1.29
FRX050-90F	0.50	1.00	4.0	40	72/90	0.77	0.50	1.17
FRX055-90F	0.55	1.20	10.0	40	72/90	1.50	0.40	1.50
FRX065-90F	0.65	1.30	5.3	40	72/90	0.88	0.31	0.72
FRX075-90F	0.75	1.50	6.3	40	72/90	0.92	0.25	0.60
FRX090-90F	0.90	1.80	7.2	40	72/90	0.99	0.20	0.47
FRX110-90F	1.10	2.20	8.2	40	72/90	1.50	0.15	0.38
FRX135-90F	1.35	2.70	9.6	40	72/90	1.70	0.12	0.30
FRX160-90F	1.60	3.20	11.4	40	72/90	1.90	0.09	0.22
FRX185-90F	1.85	3.70	12.6	40	72/90	2.10	0.08	0.19
FRX250-90F	2.50	5.00	15.6	40	72/90	2.50	0.05	0.13
FRX300-90F	3.00	6.00	19.8	40	72/90	2.80	0.04	0.10
FRX375-90F	3.75	7.50	24.0	40	72/90	3.20	0.03	0.08

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%

Typical Time-To-Trip at 23°C

- A = FRX010-90F
- B = FRX015-90F
- C = FRX017-90F
- D = FRX020-90F
- E = FRX025-90F
- F = FRX030-90F
- G = FRX035-90F
- H = FRX040-90F
- I = FRX050-90F
- J = FRX055-90F
- K = FRX065-90F
- L = FRX075-90F
- M = FRX090-90F
- N = FRX110-90F
- O = FRX135-90F
- P = FRX160-90F
- Q = FRX185-90F
- R = FRX250-90F
- S = FRX300-90F
- T = FRX375-90F

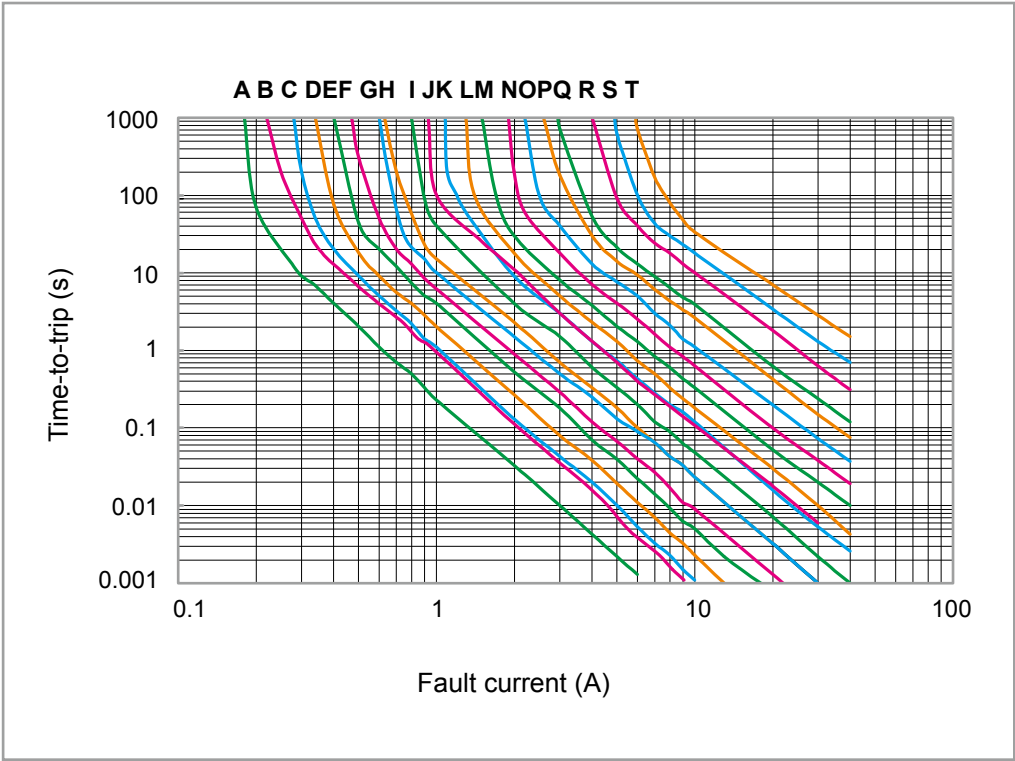

FRX90V Product Dimensions (mm)




Fig.1
Lead Size : 24AWG
Φ 0.51 mm Diameter





Fig.2
Lead Size : 20AWG
Φ 0.81 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRX010-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX015-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-90F	1	7.4	13.0	5.1	7.6	3.1	1.1
FRX035-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX040-90F	1	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-90F	1	7.9	13.7	5.1	7.6	3.1	1.1
FRX055-90F	1	9.7	14.0	5.1	7.6	3.1	1.1
FRX065-90F	1	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-90F	1	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-90F	1	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-90F	2	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-90F	2	14.5	19.6	5.1	7.6	3.1	1.4
FRX160-90F	2	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-90F	2	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-90F	2	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-90F	2	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-90F	2	28.5	33.5	10.2	7.6	3.1	1.4



Physical specifications

Lead material : FRX010-90F~FRX090-90F Tin plated copper, 24 AWG.
 FRX110-90F~FRX375-90F Tin plated copper, 20 AWG.
 Soldering characteristics : MIL-STD-202, Method 208E.
 Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

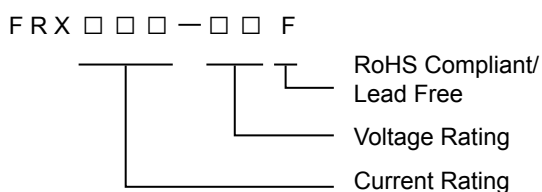

Part Marking System

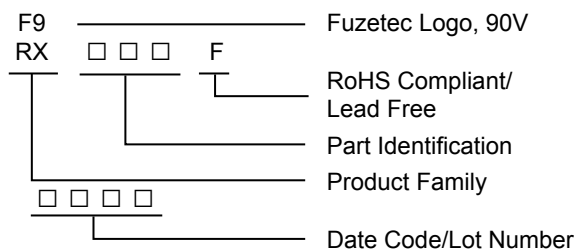


Package Information

Part Number	Standard Package
FRX010-90F~FRX055-90F	: 500Pcs/Bag, 3.0K Reel/Tape
FRX065-90F~FRX090-90F	: 300Pcs/Bag, 3.0K Reel/Tape
FRX110-90F	: 300Pcs/Bag, 1.5K Reel/Tape
FRX135-90F~FRX185-90F	: 200Pcs/Bag, 1.5K Reel/Tape
FRX250-90F~FRX375-90F	: 100Pcs/Bag, 1.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRU Series

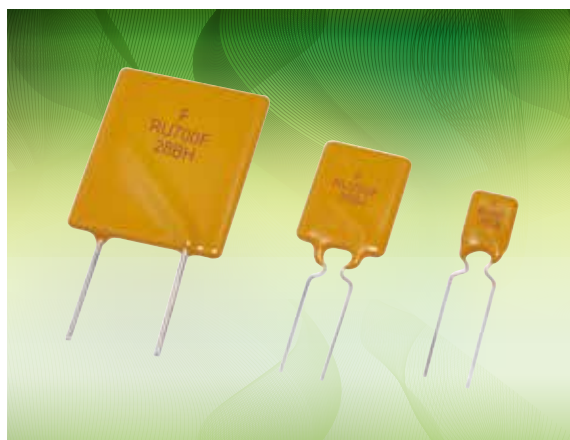

Application

Wide variety of electronic equipment

Product Features

Low resistance, High hold current, Solid state

Radial-leaded product ideal for up to 30V_{DC}



Operation Current

0.90A~9.00A

Maximum Voltage

30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRU090-30F	0.90	1.80	5.9	100	30	0.6	0.070	0.220
FRU110-30F	1.10	2.20	6.6	100	30	0.7	0.050	0.170
FRU135-30F	1.35	2.70	7.3	100	30	0.8	0.040	0.130
FRU160-30F	1.60	3.20	8.0	100	30	0.9	0.030	0.110
FRU185-30F	1.85	3.70	8.7	100	30	1.0	0.030	0.090
FRU250-30F	2.50	5.00	10.3	100	30	1.2	0.020	0.070
FRU300-30F	3.00	6.00	10.8	100	30	2.0	0.020	0.080
FRU400-30F	4.00	8.00	12.7	100	30	2.5	0.010	0.050
FRU500-30F	5.00	10.00	14.5	100	30	3.0	0.010	0.050
FRU600-30F	6.00	12.00	16.0	100	30	3.5	0.005	0.040
FRU700-30F	7.00	14.00	17.5	100	30	3.8	0.005	0.030
FRU800-30F	8.00	16.00	18.8	100	30	4.0	0.005	0.020
FRU900-30F	9.00	18.00	20.0	100	30	4.2	0.005	0.020

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	76%	70%	61%	50%

Typical Time-To-Trip at 23°C

- A = FRU090-30F
- B = FRU110-30F
- C = FRU135-30F
- D = FRU160-30F
- E = FRU185-30F
- F = FRU250-30F
- G = FRU300-30F
- H = FRU400-30F
- I = FRU500-30F
- J = FRU600-30F
- K = FRU700-30F
- L = FRU800-30F
- M = FRU900-30F

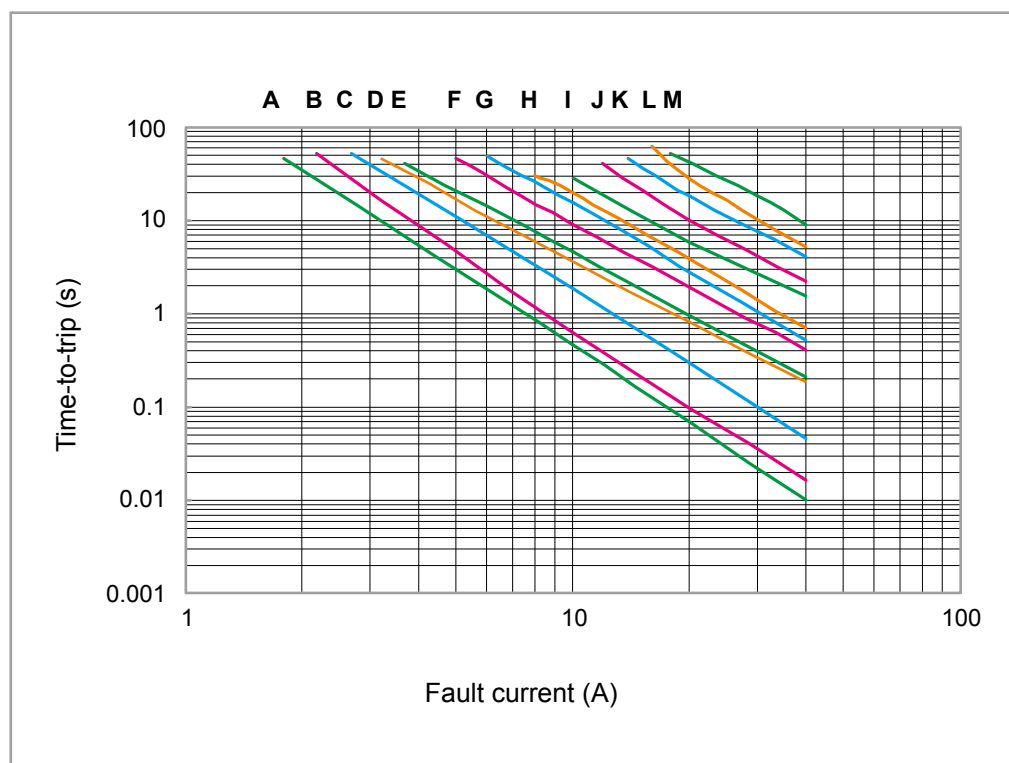

FRU Product Dimensions (mm)




Fig.1

Lead Size : 24AWG
 Φ 0.51 mm Diameter




Fig.2


Lead Size : 20AWG
 Φ 0.81 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRU090-30F	1	7.4	12.2	5.1	7.6	3.0	0.9
FRU110-30F	1	7.4	14.2	5.1	7.6	3.0	0.9
FRU135-30F	1	8.9	13.5	5.1	7.6	3.0	0.9
FRU160-30F	1	8.9	15.2	5.1	7.6	3.0	0.9
FRU185-30F	1	10.2	15.7	5.1	7.6	3.0	0.9
FRU250-30F	1	11.4	18.3	5.1	7.6	3.0	0.9
FRU300-30F	2	11.4	17.3	5.1	7.6	3.0	1.2
FRU400-30F	2	14.0	20.1	5.1	7.6	3.0	1.2
FRU500-30F	2	14.0	24.9	10.2	7.6	3.0	1.2
FRU600-30F	2	16.5	24.9	10.2	7.6	3.0	1.2
FRU700-30F	2	19.1	26.7	10.2	7.6	3.0	1.2
FRU800-30F	2	21.6	29.2	10.2	7.6	3.0	1.2
FRU900-30F	2	24.1	29.7	10.2	7.6	3.0	1.2


Physical specifications

Lead material : FRU090-30F~FRU250-30F Tin plated copper, 24 AWG.
FRU300-30F~FRU900-30F Tin plated copper, 20 AWG.
Soldering characteristics : MIL-STD-202, Method 208E.
Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

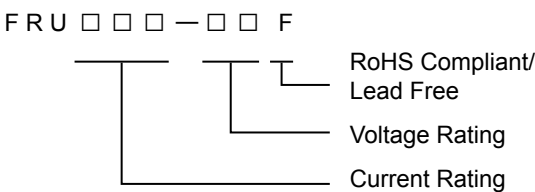

Part Marking System

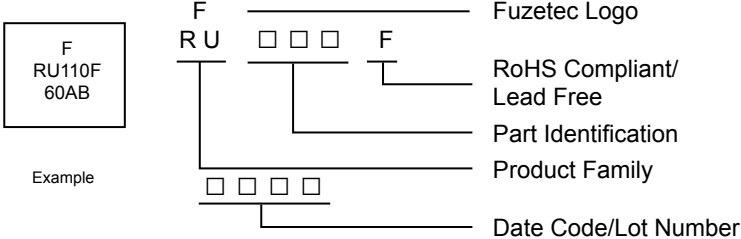


Package Information

Part Number	Standard Package
FRU090-30F~FRU110-30F	: 500 Pcs/Bag, 3.0K Reel/Tape
FRU135-30F~FRU250-30F	: 300 Pcs/Bag, 3.0K Reel/Tape
FRU300-30F~FRU400-30F	: 200 Pcs/Bag, 1.5K Reel/Tape
FRU500-30F	: 200 Pcs/Bag, 1.0K Reel/Tape
FRU600-30F~FRU900-30F	: 100 Pcs/Bag

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRT Series

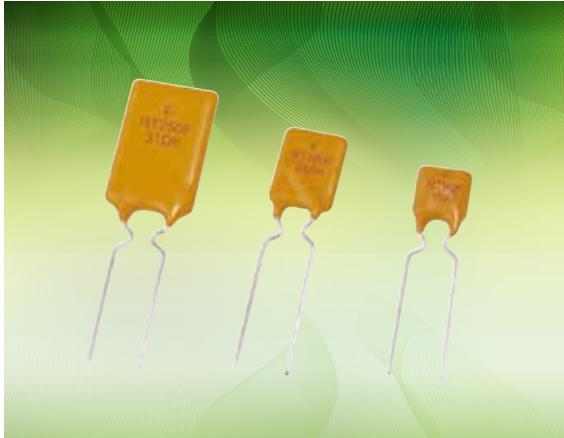

Application

IEEE 1394 Firewire, Computers & Consumer electronics

Product Features

Fast trip time, Lower Trip-to-hold Ratio, Radial-leaded product ideal for up to 36V_{DC}



Operation Current

0.50A~2.50A

Maximum Voltage

36V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , S	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRT050-33F	0.50	1.00	5.0	40	36	0.67	0.140	0.448
FRT075-33F	0.75	1.50	4.0	40	36	0.71	0.115	0.368
FRT090-33F	0.90	1.80	3.5	40	36	0.74	0.090	0.288
FRT120-33F	1.20	2.30	3.5	40	36	0.78	0.074	0.180
FRT135-33F	1.35	2.50	4.5	40	36	0.84	0.059	0.143
FRT160-33F	1.60	2.75	4.5	40	36	0.86	0.041	0.131
FRT190-33F	1.90	3.00	3.5	40	36	0.90	0.045	0.092
FRT220-33F	2.20	3.50	6.5	40	36	0.95	0.025	0.080
FRT250-33F	2.50	4.00	8.0	40	36	0.99	0.020	0.064

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	148%	134%	120%	100%	98%	90%	84%	78%	70%	59%


Typical Time-To-Trip at 23°C

- A = FRT050-33F
- B = FRT075-33F
- C = FRT090-33F
- D = FRT120-33F
- E = FRT135-33F
- F = FRT160-33F
- G = FRT190-33F
- H = FRT220-33F
- I = FRT250-33F

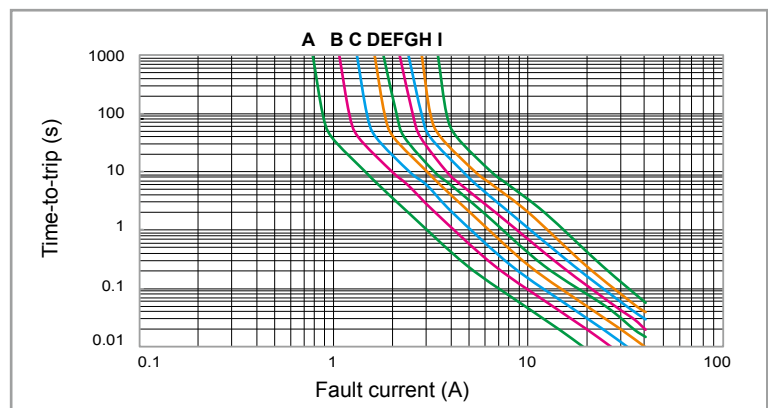

NOTE : All Specifications subject to change without notice.

FRT Product Dimensions (mm)

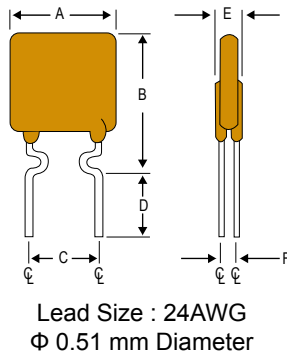

Part Number	A	B	C	D	E	F
	Max.	Max.	Typ.	Min.	Max.	Typ.
FRT050-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT075-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT090-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT120-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT135-33F	7.4	14.2	5.1	7.6	3.0	1.1
FRT160-33F	7.4	14.0	5.1	7.6	3.0	1.1
FRT190-33F	9.0	13.5	5.1	7.6	3.0	1.1
FRT220-33F	10.0	17.0	5.1	7.6	3.0	1.1
FRT250-33F	10.0	19.5	5.1	7.6	3.0	1.1


Physical specifications

Lead material : Tin plated copper, 24 AWG.


Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94-V-0 requirement.

Part Numbering System

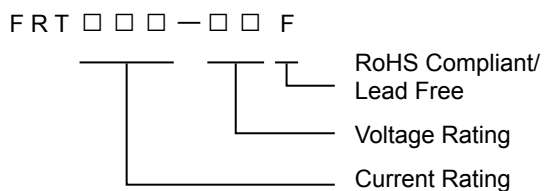

Part Marking System

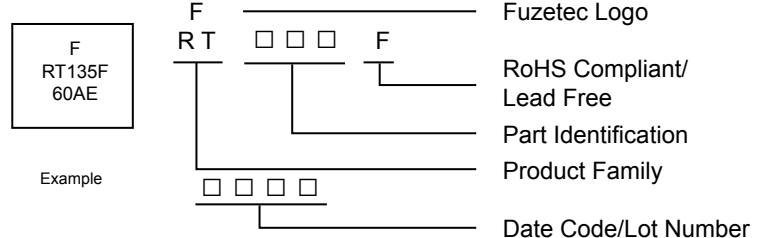


Package Information

Part Number	Standard Package
FRT050-33F~FRT250-33F	: 500 Pcs/Bag, 3.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FUSB Series

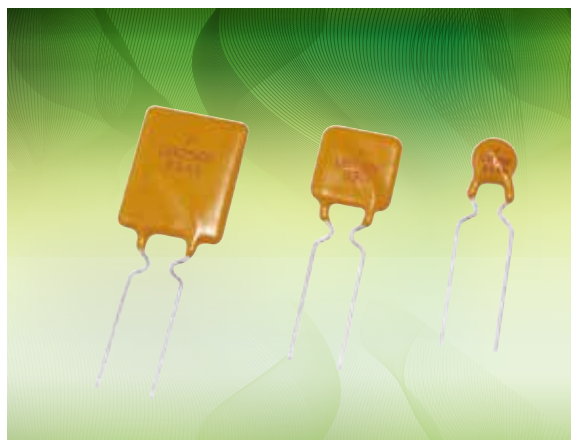

Application

Low voltage USB equipment

Product Features

Low resistance, Fast trip time, Lower Trip-to-hold Ratio



Operation Current

0.75A ~2.50A

Maximum Voltage

16V/30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip		Max. Current	Rated Voltage	Typ. Power	Resistance	
			Current	Time				R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	A	Sec	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FUSB075F	0.75	1.30	8.0	0.4	40	16	0.3	0.08	0.23
FUSB090F	0.90	1.80	8.0	1.2	40	16/30	0.6	0.07	0.18
FUSB110F	1.10	2.20	8.0	2.3	40	16/30	0.7	0.05	0.14
FUSB120F	1.20	2.00	8.0	0.7	40	16	0.6	0.04	0.14
FUSB135F	1.35	2.70	8.0	4.5	40	16/30	0.8	0.04	0.12
FUSB155F	1.55	2.70	7.8	2.2	40	16	0.7	0.03	0.12
FUSB160F	1.60	3.20	8.0	9.0	40	16/30	0.9	0.03	0.11
FUSB185F	1.85	3.70	8.0	10.0	40	16/30	1.0	0.03	0.09
FUSB250F	2.50	5.00	8.0	40.0	40	16/30	1.2	0.02	0.07

Thermal Derating for PPTC Device at Various Ambient Temperatures


TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	91%	83%	78%	70%	61%	50%

Typical Time-To-Trip at 23°C


A = FUSB075F
B = FUSB120F
C = FUSB155F

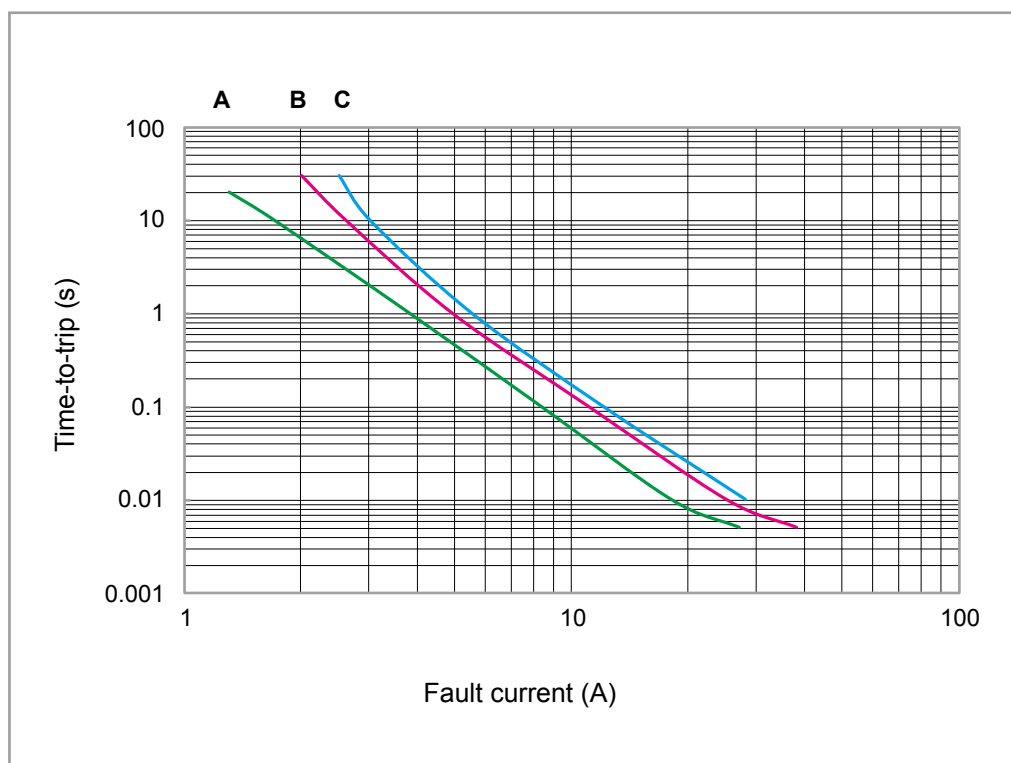

D = FUSB090F
E = FUSB110F
F = FUSB135F
G = FUSB160F
H = FUSB185F
I = FUSB250F

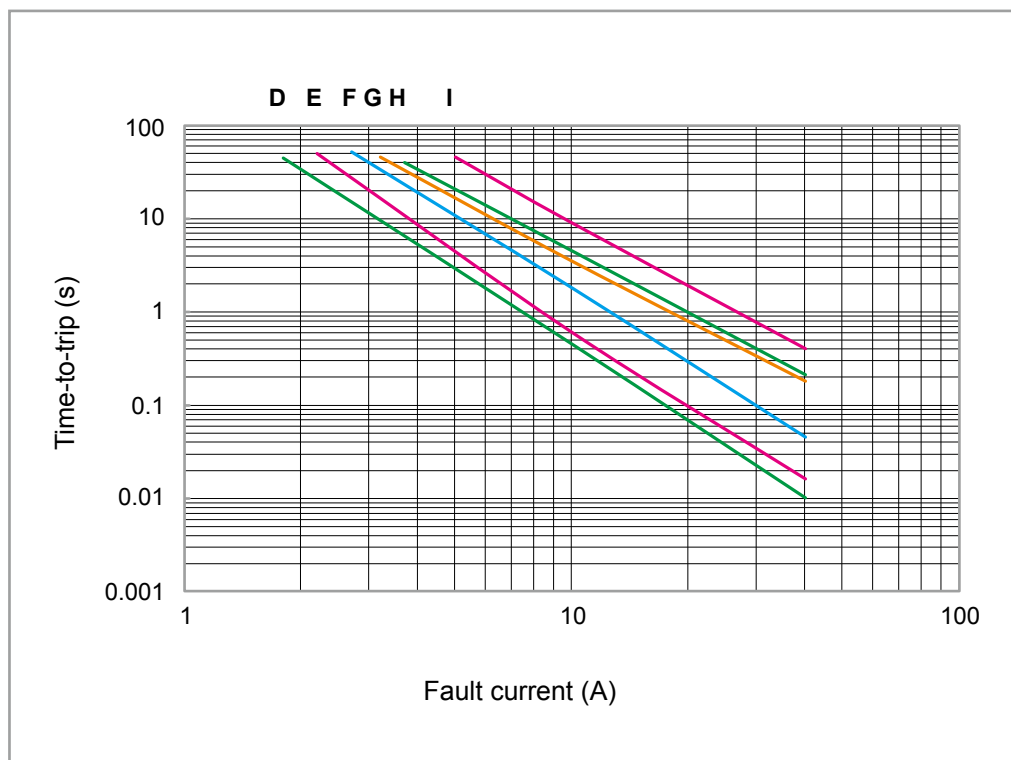

FUSB Product Dimensions (mm)

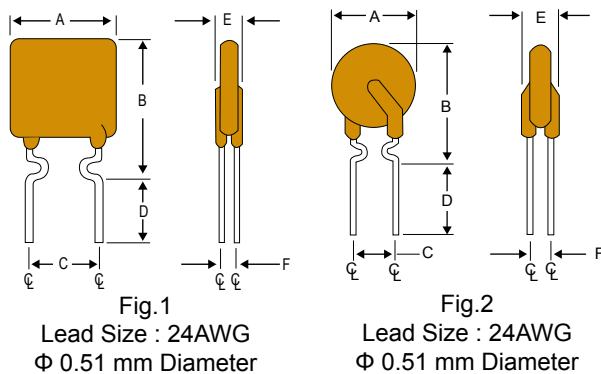

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FUSB075F	2	6.9	11.4	5.1	7.6	3.0	0.8
FUSB090F	1	7.4	12.2	5.1	7.6	3.0	0.8
FUSB110F	1	7.4	14.2	5.1	7.6	3.0	0.8
FUSB120F	2	6.9	11.7	5.1	7.6	3.0	0.8
FUSB135F	1	8.9	13.5	5.1	7.6	3.0	0.8
FUSB155F	2	6.9	11.7	5.1	7.6	3.0	0.8
FUSB160F	1	8.9	15.2	5.1	7.6	3.0	0.8
FUSB185F	1	10.2	15.7	5.1	7.6	3.0	0.8
FUSB250F	1	11.4	18.3	5.1	7.6	3.0	0.8


Physical specifications

Lead material : Tin plated copper, 24 AWG.


Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy polymer, meets UL-94V-0 requirement.


Part Numbering System

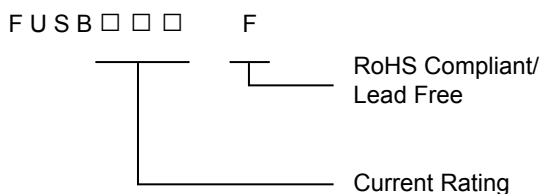

Part Marking System



Example

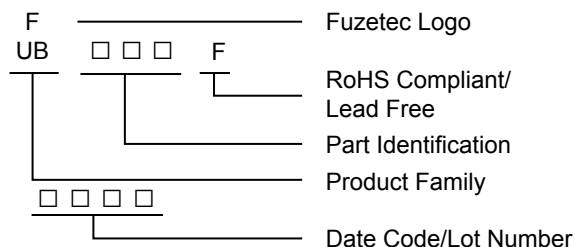

Package Information

Part Number	Standard Package
FUSB075F~FUSB250F	: 500 Pcs/Bag, 3.0K Reel/Tape

Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRG Series



Application

Wide variety of electronic equipment

Product Features

Very high hold current, Solid state Radial-leaded product ideal for up to 16V_{DC}



Operation Current

2.50 A~14.00A

Maximum Voltage

16V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRG250-16F	2.5	4.7	5.0	100	16	1.0	0.022	0.053
FRG300-16F	3.0	5.1	2.0	100	16	2.3	0.034	0.105
FRG400-16F	4.0	6.8	3.5	100	16	2.4	0.020	0.063
FRG500-16F	5.0	8.5	3.6	100	16	2.6	0.014	0.044
FRG600-16F	6.0	10.2	5.8	100	16	2.8	0.009	0.033
FRG700-16F	7.0	11.9	8.0	100	16	3.0	0.006	0.021
FRG800-16F	8.0	13.6	9.0	100	16	3.0	0.005	0.018
FRG900-16F	9.0	15.3	12.0	100	16	3.3	0.004	0.015
FRG1000-16F	10.0	17.0	12.5	100	16	3.3	0.003	0.012
FRG1100-16F	11.0	18.7	13.5	100	16	3.7	0.003	0.010
FRG1200-16F	12.0	20.4	16.0	100	16	4.2	0.002	0.009
FRG1400-16F	14.0	23.8	20.0	100	16	4.6	0.002	0.008

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	148%	132%	116%	100%	91%	84%	76%	69%	60%	48%

Typical Time-To-Trip at 23°C

- A = FRG250-16F
- B = FRG300-16F
- C = FRG400-16F
- D = FRG500-16F
- E = FRG600-16F
- F = FRG700-16F
- G = FRG800-16F
- H = FRG900-16F
- I = FRG1000-16F
- J = FRG1100-16F
- K = FRG1200-16F
- L = FRG1400-16F

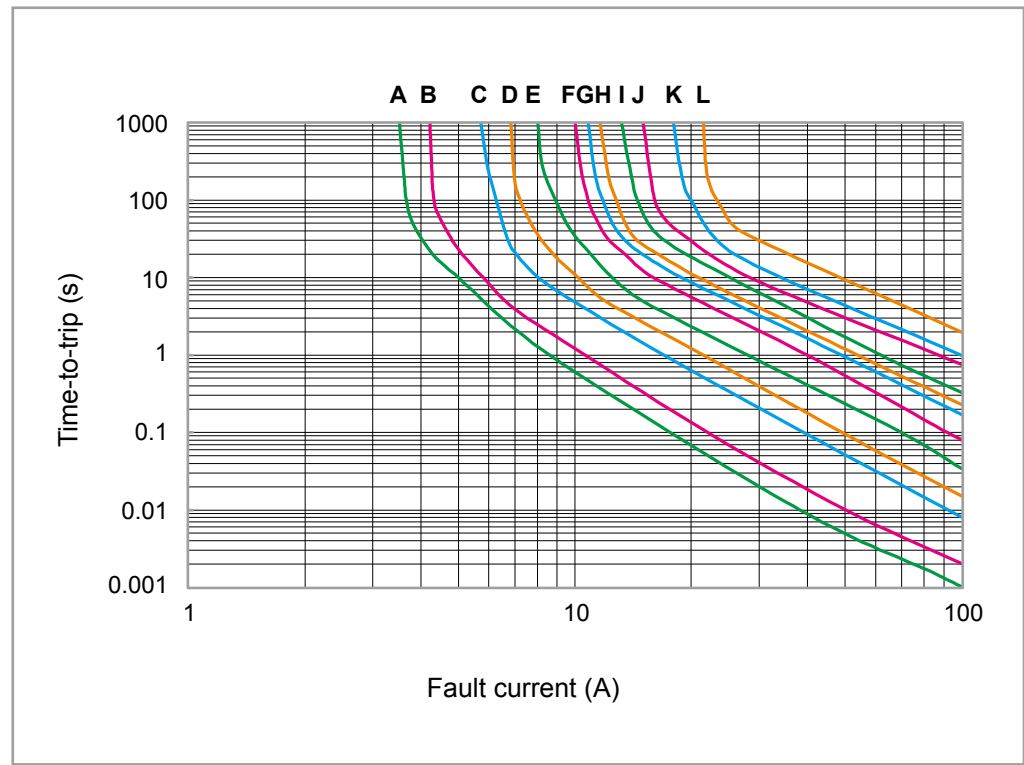

FRG Product Dimensions (mm)

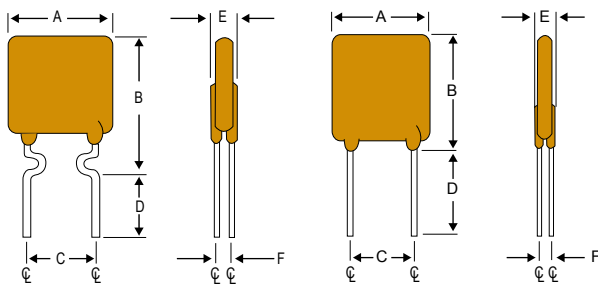


Fig.1

Lead Size : 24AWG
Φ 0.51 mm Diameter

Fig.2

Lead Size : 20AWG
Φ 0.81 mm Diameter




Fig.3


Lead Size : 18AWG
Φ 1.0 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRG250-16F	1	8.9	12.8	5.1	7.6	3.0	1.2
FRG300-16F	2	7.1	11.0	5.1	7.6	3.0	1.2
FRG400-16F	2	8.9	12.8	5.1	7.6	3.0	1.2
FRG500-16F	2	10.4	14.3	5.1	7.6	3.0	1.2
FRG600-16F	2	10.7	17.1	5.1	7.6	3.0	1.2
FRG700-16F	2	11.2	19.7	5.1	7.6	3.0	1.2
FRG800-16F	2	12.7	20.9	5.1	7.6	3.0	1.2
FRG900-16F	2	14.0	21.7	5.1	7.6	3.0	1.2
FRG1000-16F	2	16.5	24.1	5.1	7.6	3.0	1.2
FRG1100-16F	2	17.5	26.0	5.1	7.6	3.0	1.2
FRG1200-16F	3	17.5	28.0	10.2	7.6	3.6	1.4
FRG1400-16F	3	27.9	27.9	10.2	7.6	3.6	1.4


Physical specifications

Lead material : FRG250-16F Tin plated copper, 24 AWG.
FRG300-16F~FRG1100-16F Tin plated copper, 20 AWG.
FRG1200-16F~FRG1400-16F Tin plated copper, 18 AWG.
Soldering characteristics : MIL-STD-202, Method 208E.
Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

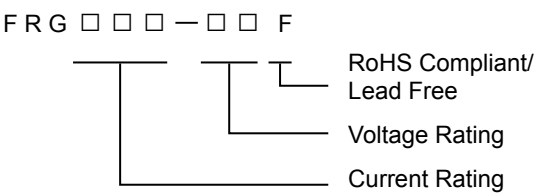

Part Marking System

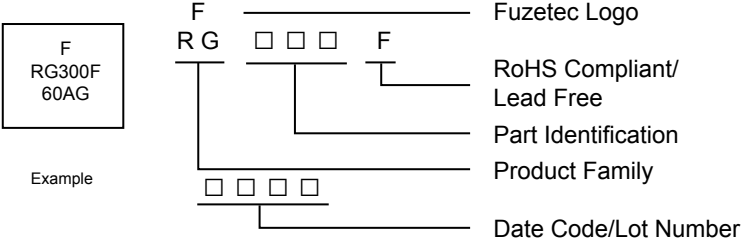

Package Information


Part Number	Standard Package
FRG250-16F~FRG300-16F	: 500 Pcs/Bag, 2.5K Reel/Tape
FRG400-16F~FRG600-16F	: 300 Pcs/Bag, 2.5K Reel/Tape
FRG700-16F	: 200 Pcs/Bag, 1.5K Reel/Tape
FRG800-16F~FRG900-16F	: 200 Pcs/Bag
FRG1000-16F~FRG1400-16F	: 100 Pcs/Bag

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FHT Series

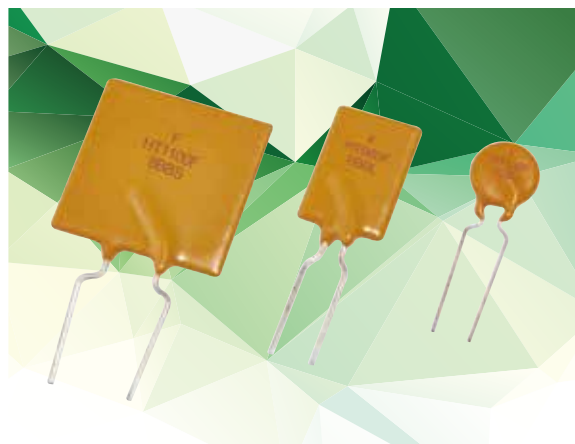

Application

Wide variety of electronic equipment

Product Features

Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 16V/30V_{DC} and operating temperatures up to 125°C.



Operation Current

0.50A~15.00A

Maximum Voltage

16V/30V_{DC}



Temperature Range

-40°C to 125°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FHT050-30F	0.5	0.9	2.5	40	30	0.9	0.4800	1.1000
FHT070-30F	0.7	1.4	3.2	40	30	1.4	0.3000	0.8000
FHT100-30F	1.0	1.8	5.2	40	30	1.4	0.1800	0.4300
FHT200-16F	2.0	3.8	3.0	100	16	1.4	0.0450	0.1100
FHT300-16F	3.0	6.0	5.0	100	16	3.0	0.0330	0.0790
FHT400-16F	4.0	7.0	5.0	100	16	3.3	0.0240	0.0600
FHT450-16F	4.5	7.8	3.0	100	16	3.6	0.0220	0.0540
FHT550-16F	5.5	10.0	6.0	100	16	3.5	0.0150	0.0370
FHT600-16F	6.0	10.8	5.0	100	16	4.1	0.0130	0.0320
FHT650-16F	6.5	12.0	5.5	100	16	4.3	0.0110	0.0260
FHT700-16F	7.0	13.0	7.0	100	16	4.0	0.0100	0.0250
FHT750-16F	7.5	13.1	7.0	100	16	4.5	0.0094	0.0220
FHT800-16F	8.0	15.0	8.0	100	16	4.2	0.0080	0.0200
FHT900-16F	9.0	16.5	10.0	100	16	5.0	0.0074	0.0170
FHT1000-16F	10.0	18.5	9.0	100	16	5.3	0.0062	0.0150
FHT1100-16F	11.0	20.0	11.0	100	16	5.5	0.0055	0.0130
FHT1300-16F	13.0	24.0	13.0	100	16	6.9	0.0041	0.0100
FHT1400-16F	14.0	27.0	13.0	100	16	6.9	0.0030	0.0090
FHT1500-16F	15.0	28.0	20.0	100	16	7.0	0.0032	0.0092

Thermal Derating for PPTC Device at Various Ambient Temperatures


TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C	125°C
DERATING %	143%	129%	116%	100%	93%	87%	80%	72%	65%	55%	26%

Typical Time-To-Trip at 23°C

- A = FHT050-30F
- B = FHT070-30F
- C = FHT100-30F
- D = FHT200-16F
- E = FHT300-16F
- F = FHT400-16F
- G = FHT450-16F
- H = FHT550-16F
- I = FHT600-16F
- J = FHT650-16F
- K = FHT700-16F
- L = FHT750-16F
- M = FHT800-16F
- N = FHT900-16F
- O = FHT1000-16F
- P = FHT1100-16F
- Q = FHT1300-16F
- R = FHT1400-16F
- S = FHT1500-16F

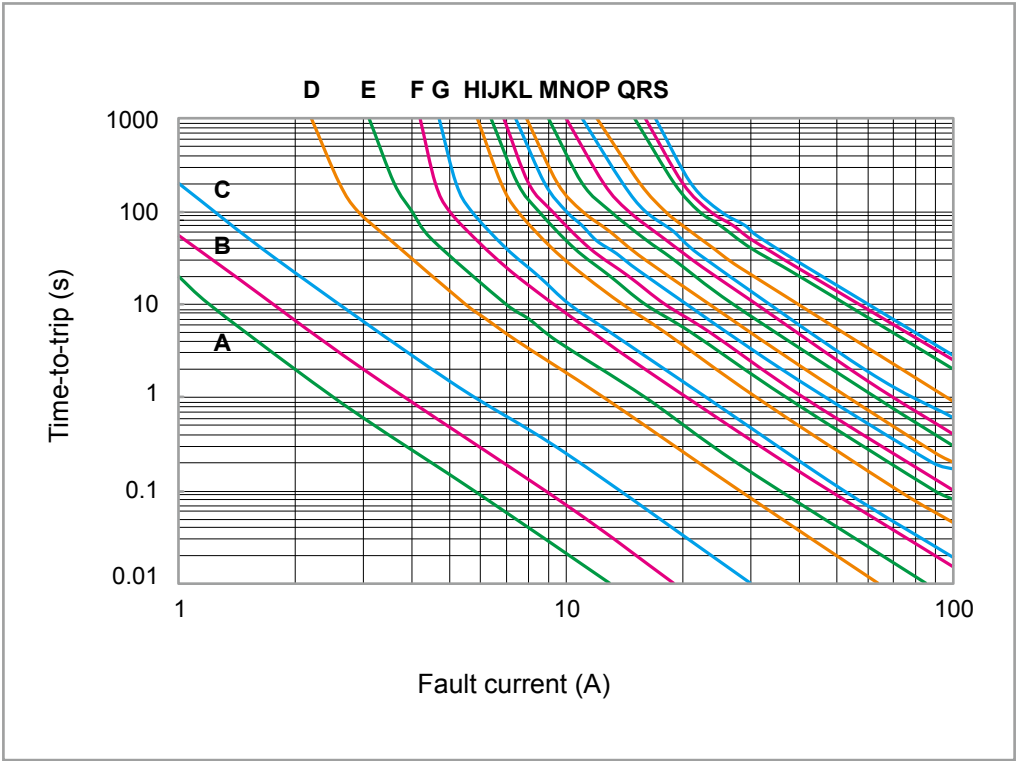

FHT Product Dimensions (mm)

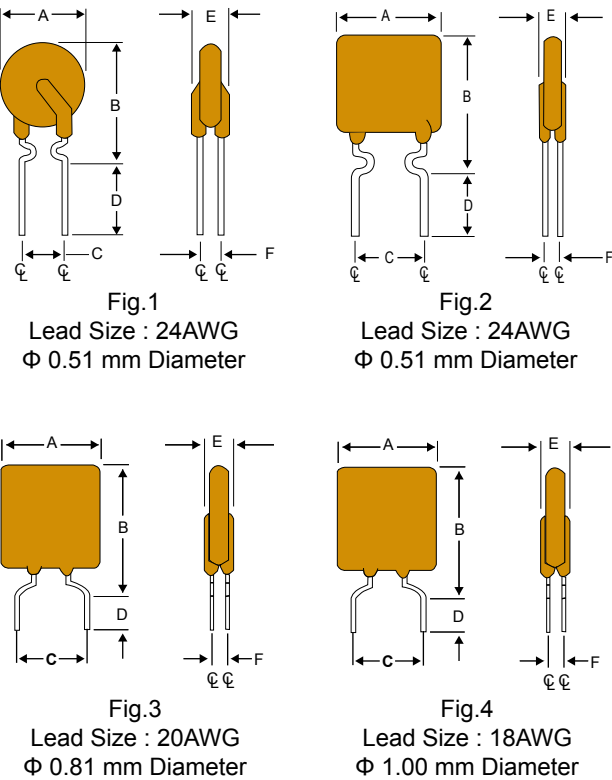

Part Number	Fig.	A B C D E F					
		Max.	Max.	Typ.	Min.	Max.	Typ.
FHT050-30F	1	7.4	12.7	5.1	7.6	3.0	1.2
FHT070-30F	2	6.9	10.8	5.1	7.6	3.0	1.2
FHT100-30F	1	9.7	13.6	5.1	7.6	3.0	1.2
FHT200-16F	1	9.4	14.4	5.1	7.6	3.0	1.2
FHT300-16F	3	8.8	13.8	5.1	7.6	3.0	1.2
FHT400-16F	3	10.0	15.0	5.1	7.6	3.0	1.2
FHT450-16F	3	10.4	15.6	5.1	7.6	3.0	1.2
FHT550-16F	3	11.2	18.9	5.1	7.6	3.0	1.2
FHT600-16F	3	11.2	21.0	5.1	7.6	3.0	1.2
FHT650-16F	3	12.7	22.2	5.1	7.6	3.0	1.2
FHT700-16F	3	14.0	21.9	5.1	7.6	3.0	1.2
FHT750-16F	3	14.0	23.5	5.1	7.6	3.0	1.2
FHT800-16F	3	16.5	22.5	5.1	7.6	3.0	1.2
FHT900-16F	3	16.5	25.7	5.1	7.6	3.0	1.2
FHT1000-16F	3	17.5	26.5	10.2	7.6	3.0	1.2
FHT1100-16F	3	21.0	26.1	10.2	7.6	3.0	1.2
FHT1300-16F	4	23.5	28.7	10.2	7.6	3.6	1.4
FHT1400-16F	4	23.5	28.7	10.2	7.6	3.6	1.4
FHT1500-16F	4	23.5	28.7	10.2	7.6	3.6	1.4

Physical specifications

Lead material : FHT050-30F~FHT100-30F and FHT200-16F Tin plated copper, 24 AWG.

FHT300-16F~FHT1100-16F Tin plated copper, 20 AWG.


FHT1300-16F~FHT1500-16F Tin plated copper, 18 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.


Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

F H T □ □ □ — □ □ F

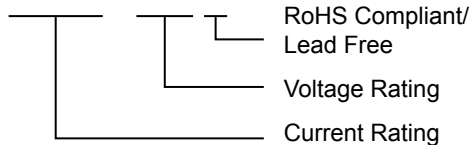

Part Marking System

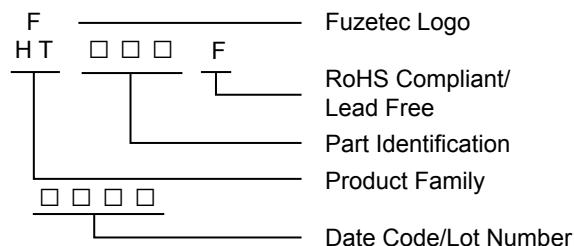

Package Information

Part Number	Standard Package
FHT050-30F~FHT300-16F	: 500 Pcs/Bag, 2.5K Reel/Tape
FHT400-16F	: 300 Pcs/Bag, 2.5K Reel/Tape
FHT450-16F~FHT550-16F	: 300 Pcs/Bag, 1.5K Reel/Tape
FHT600-16F	: 200 Pcs/Bag, 1.5K Reel/Tape
FHT650-16F~FHT700-16F	: 200 Pcs/Bag
FHT750-16F~FHT1500-16F	: 100 Pcs/Bag

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRHV Series



Application

Telecommunication and Data transmitting

Product Features

Low hold current, Solid state



Operation Current

0.08 A~0.40A

Max. Operation Voltage

60V/100V/250V_{DC}

Max. Interrupt Voltage

250V/600V_{AC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50138901)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip		Max. Current	Max. Oper. Voltage	Max. Int. Voltage	Typ. Power	Resistance	
			Current	Time					R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	A	Sec	I _{MAX} , A	V _{MAX} , V _{DC}	V _{I-MAX} , V _{AC}	Pd, W	Ohms	Ohms
FRH080-250VF	0.08	0.16	0.35	4.0	3.0	100	250	1.0	14.00	33.00
FRH110-250VF	0.11	0.22	1.00	2.0	3.0	100	250	1.0	5.00	16.00
FRH120-250VF	0.12	0.24	1.00	2.0	3.0	100	250	1.0	4.00	16.00
FRH145-250VF	0.15	0.29	1.00	2.5	3.0	100	250	1.0	3.00	12.00
FRH180-250XF	0.18	0.65	3.00	2.0	10.0	100	250	1.0	0.80	4.00
FRH150-600MF	0.15	0.30	1.00	4.0	3.0	250	600	1.0	6.00	17.00
FRH160-600MF	0.16	0.32	1.00	7.0	3.0	250	600	1.0	4.00	16.00
FRH160-600VF	0.16	0.32	1.00	7.0	3.0	250	600	1.0	4.00	18.00
FRH200-600VF	0.20	0.40	1.00	12.0	3.0	250	600	1.0	4.00	13.50
FRH250-600VF	0.25	0.85	3.00	1.0	3.0	250	600	1.0	1.00	7.00
FRH400-600F	0.40	1.00	3.00	4.0	3.0	60	600	1.0	0.95	1.90

Thermal Derating for PPTC Device at Various Ambient Temperatures


TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	92%	83%	73%	64%	54%	40%

Typical Time-To-Trip at 23°C

- A = FRH080-250VF
- B = FRH110-250VF
- C = FRH120-250VF
- D = FRH145-250VF
- E = FRH160-600VF
- F = FRH200-600VF
- G = FRH250-600VF
- H = FRH400-600F

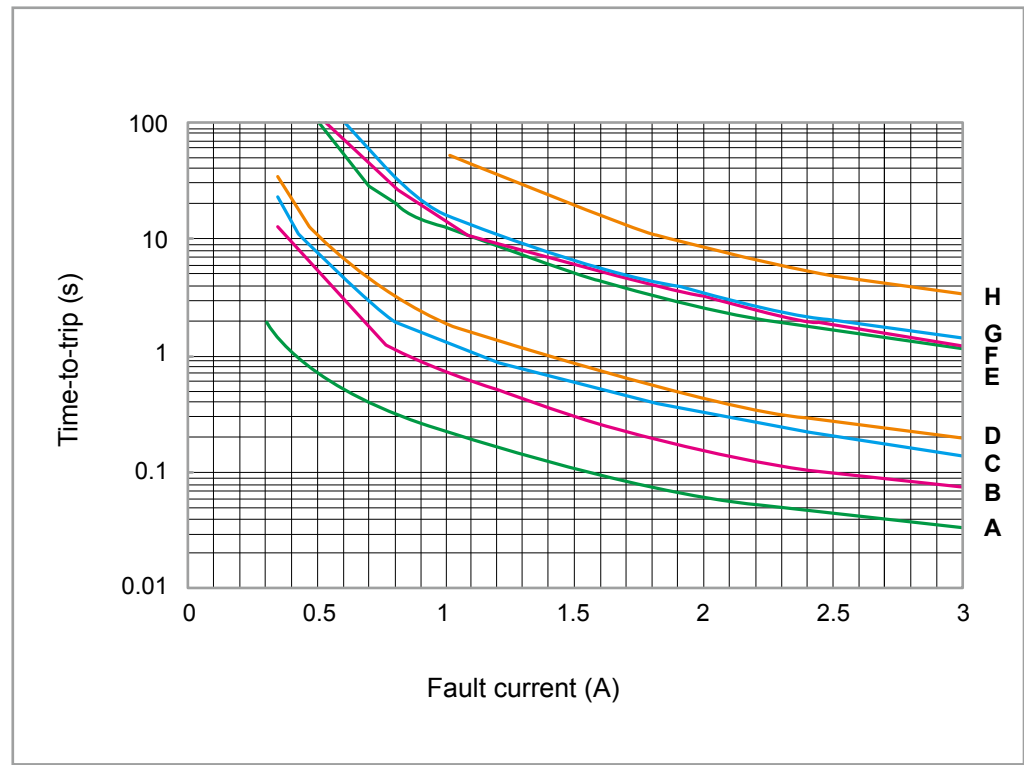

- I = FRH150-600MF
- J = FRH180-250XF
- K = FRH160-600MF

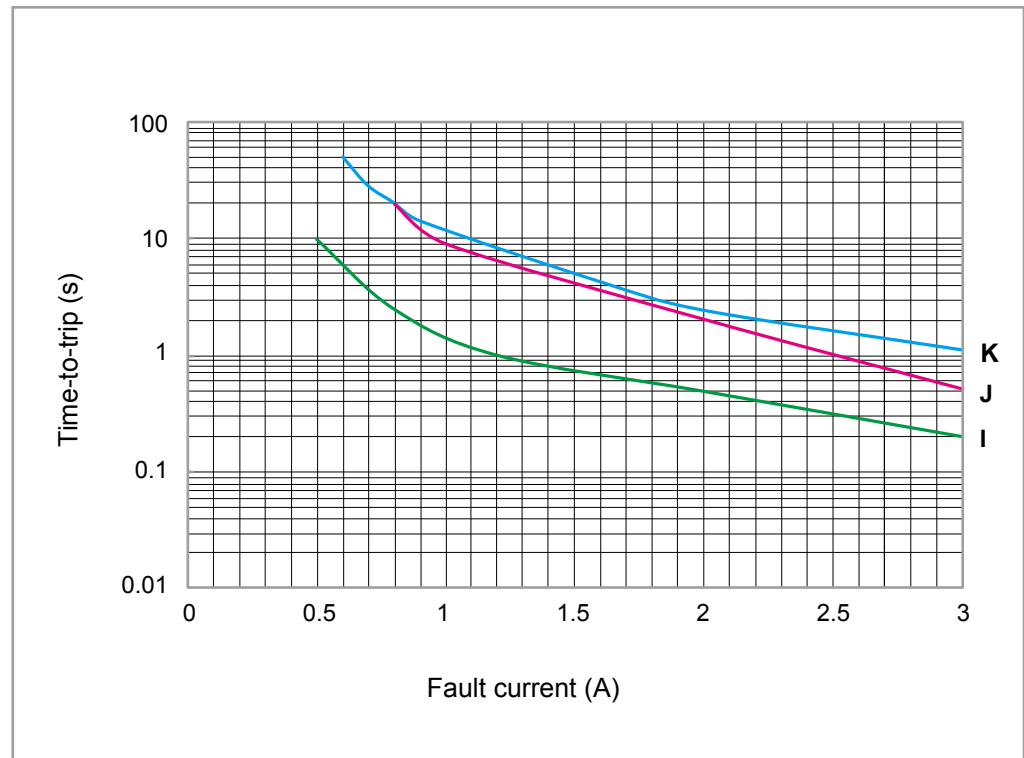

FRHV Product Dimensions (mm)




Fig.1
Lead Size : 22AWG
Φ 0.65 mm Diameter




Fig.2
Lead Size : 22AWG
Φ 0.65 mm Diameter

Part Number	Fig.	A	B	C	D	E
		Max.	Max.	Typ.	Min.	Max.
FRH080-250VF	1	5.8	9.6	5.0	4.7	4.6
FRH110-250VF	1	6.8	9.9	5.0	4.7	4.6
FRH120-250VF	2	6.5	11.0	5.0	4.7	4.6
FRH145-250VF	2	6.5	11.0	5.0	4.7	4.6
FRH180-250XF	1	9.0	12.0	5.0	4.7	3.8
FRH150-600MF	2	9.0	12.5	5.0	4.7	4.6
FRH160-600MF	2	9.0	12.5	5.0	4.7	4.6
FRH160-600VF	2	16.0	12.6	5.0	4.7	6.0
FRH200-600VF	2	12.0	14.0	5.0	4.7	6.0
FRH250-600VF	2	12.0	15.0	5.0	4.7	6.0
FRH400-600F	2	15.0	14.5	5.0	4.7	6.0

Physical specifications

Lead material : Tin plated copper, 22 AWG

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meet UL-94V-0 requirement.


*NOTE : All FRHV products are designed to assist equipment to pass ITU, UL60950 or GR1089 specification.

*FRH150-600MF, FRH160-600VF meet UL497A Overvoltage and Endurance Conditioning requirements for Thermistor type component.


CAUTION : FRHV devices are not intended for continuous use of Line Voltage such as 120V_{AC} ~ 600V_{AC} and above.

Part Numbering System

FRH□□□-□□□VF

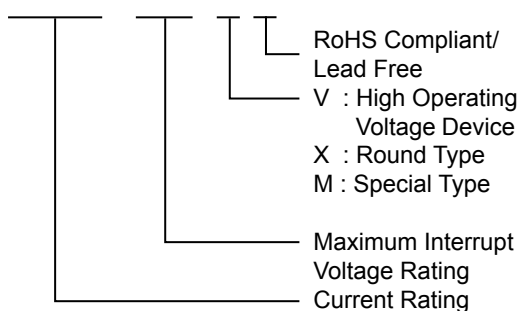

Part Marking System

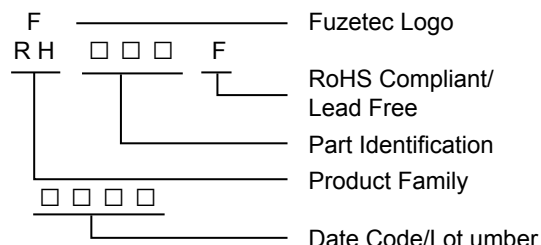

- * FRH150-600MF Marking : RH6150F
- * FRH160-600MF Marking : RH6160F
- * FRH160-600VF Marking : RH6160F
- * FRH200-600VF Marking : RH6200F
- * FRH250-600VF Marking : RH6250F
- * FRH400-600F Marking : RH6400F

Package Information

Part Number	Standard Package
FRH080-250VF~FRH145-250VF	300 Pcs/Bag, 1.5K Reel/Tape
FRH180-250XF	200 Pcs/Bag, 1.5K Reel/Tape
FRH150-600MF~FRH160-600MF	100 Pcs/Bag, 1.2K Reel/Tape
FRH160-600VF	100 Pcs/Bag, 0.6K Reel/Tape
FRH200-600VF~FRH400-600F	100 Pcs/Bag

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRVL Series



Application

Line Voltage Power Supply, Transformer and Appliances Product

Features

Solid state, Radial leaded product ideal for up to 120V_{AC/DC}



Maximum Operation Current

0.10A~3.75A

Maximum Voltage

120V_{AC/DC}

Maximum Interrupt Voltage

135V_{AC/DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50122733)



Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Max. Oper. Voltage	Max. Int. Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{AC/DC}	V _{I-MAX} , V _{AC/DC}	P _d , W	R _{MIN}	R _{1MAX}
								Ohms	Ohms
FRVL010-120F	0.10	0.20	10.0	2.0	120	135	0.84	3.00	7.50
FRVL017-120F	0.17	0.34	10.0	2.0	120	135	0.84	2.00	7.00
FRVL020-120F	0.20	0.40	9.0	2.0	120	135	1.08	1.83	4.40
FRVL025-120F	0.25	0.50	7.5	3.0	120	135	1.08	1.25	3.00
FRVL030-120F	0.30	0.60	8.5	3.0	120	135	1.44	0.88	2.10
FRVL040-120F	0.40	0.80	6.5	3.0	120	135	1.44	0.55	1.29
FRVL050-120F	0.50	1.00	6.0	3.0	120	135	1.56	0.50	1.17
FRVL065-120F	0.65	1.30	5.7	5.0	120	135	1.68	0.31	0.72
FRVL070-120F	0.75	1.50	6.3	5.0	120	135	1.80	0.25	0.60
FRVL075-120F	0.75	1.50	15.0	7.5	120	135	2.64	0.25	0.69
FRVL090-120F	0.90	1.80	7.2	5.0	120	135	1.80	0.20	0.47
FRVL100-120F	1.00	2.00	15.0	10.0	120	135	2.64	0.18	0.47
FRVL110-120F	1.10	2.20	8.2	8.0	120	135	2.28	0.15	0.38
FRVL125-120F	1.25	2.50	20.0	12.5	120	135	2.88	0.11	0.33
FRVL130-120F	1.35	2.70	9.6	10.0	120	135	2.64	0.12	0.30
FRVL135-120F	1.35	2.70	20.0	13.5	120	135	3.12	0.11	0.30
FRVL160-120F	1.60	3.20	11.4	12.0	120	135	3.12	0.09	0.22
FRVL185-120F	1.85	3.70	12.6	12.0	120	135	3.36	0.08	0.19
FRVL200-120F	2.00	4.20	36.0	20.0	120	135	4.32	0.08	0.21
FRVL250-120F	2.50	5.00	15.6	15.0	120	135	4.44	0.05	0.13
FRVL300-120F	3.00	6.00	19.8	17.0	120	135	4.56	0.04	0.10
FRVL375-120F	3.75	7.50	24.0	20.0	120	135	4.80	0.03	0.08

Thermal Derating for PPTC Device at Various Ambient Temperatures


TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	80%	70%	60%	50%	38%

Typical Time-To-Trip at 23°C

A = FRVL010-120F
B = FRVL017-120F
C = FRVL020-120F
D = FRVL025-120F
E = FRVL030-120F
F = FRVL040-120F
G = FRVL050-120F
H = FRVL065-120F
I = FRVL070-120F
J = FRVL090-120F
K = FRVL110-120F
L = FRVL130-120F
M = FRVL160-120F
N = FRVL185-120F
O = FRVL250-120F
P = FRVL300-120F
Q = FRVL375-120F

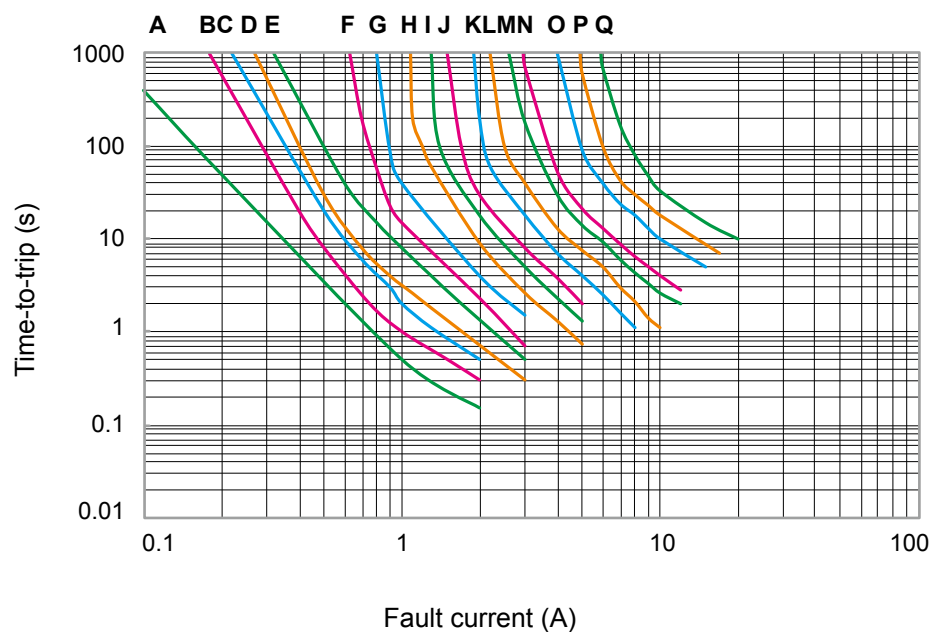

R = FRVL075-120F
S = FRVL100-120F
T = FRVL125-120F
U = FRVL135-120F
V = FRVL200-120F

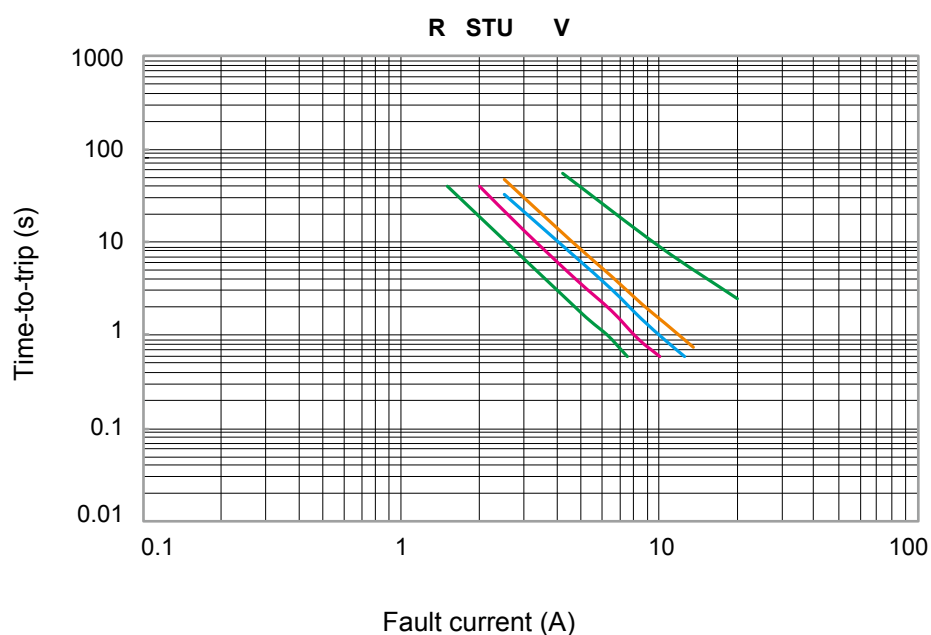

FRVL Product Dimensions (mm)




Fig.1

Lead Size : 24AWG
Φ 0.51 mm Diameter




Fig.2

Lead Size : 22AWG
Φ 0.65 mm Diameter




Fig.3

Lead Size : 20AWG
Φ 0.81 mm Diameter




Fig.4

Lead Size : 20AWG
Φ 0.81 mm Diameter


Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRVL010-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL017-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL020-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL025-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL030-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL040-120F	2	8.2	14.2	5.1	7.6	3.8	2.2
FRVL050-120F	2	9.2	14.9	5.1	7.6	3.8	2.2
FRVL065-120F	2	9.7	14.9	5.1	7.6	3.8	2.2
FRVL070-120F	2	10.6	15.5	5.1	7.6	3.8	2.2
FRVL075-120F	4	10.9	17.0	5.1	7.6	4.1	2.2
FRVL090-120F	2	11.9	15.9	5.1	7.6	3.8	2.2
FRVL100-120F	4	11.5	20.1	5.1	7.6	4.1	2.2
FRVL110-120F	3	13.3	18.3	5.1	7.6	4.1	2.2
FRVL125-120F	4	14.0	21.7	5.1	7.6	4.1	2.2
FRVL130-120F	3	15.5	20.6	5.1	7.6	4.1	2.2
FRVL135-120F	4	16.3	21.7	5.1	7.6	4.1	2.2
FRVL160-120F	3	17.5	22.5	5.1	7.6	4.1	2.2
FRVL185-120F	3	19.9	24.9	5.1	7.6	4.1	2.2
FRVL200-120F	4	23.5	27.9	10.2	7.6	4.1	2.2
FRVL250-120F	3	22.5	27.5	10.2	7.6	4.1	2.2
FRVL300-120F	3	25.5	30.0	10.2	7.6	4.1	2.2
FRVL375-120F	3	29.5	34.0	10.2	7.6	4.1	2.2

Physical specifications



Lead material : FRVL010-120F~FRVL017-120F Tin plated copper, 24AWG.
FRVL020-120F~FRVL070-120F and FRVL090-120F Tin plated copper, 22AWG.
FRVL075-120F and FRVL100-120F~FRVL375-120F Tin plated copper, 20AWG.
Soldering characteristics : MIL-STD-202, Method 208E.
Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Part Numbering System

FRVL □ □ □ - □ □ □ F

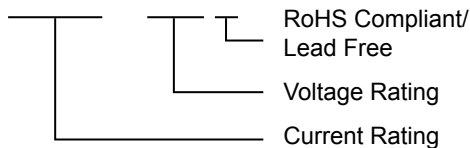

Part Marking System

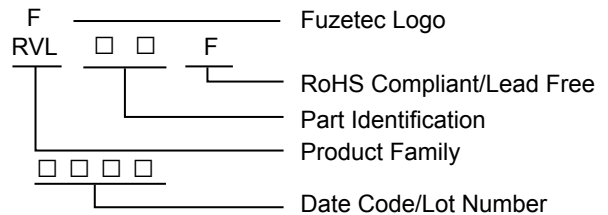


Package Information

Part Number	Standard Package
FRVL010-120F~FRVL050-120F	: 500 Pcs/Bag, 2.0K Reel/Tape
FRVL065-120F~FRVL075-120F	: 300 Pcs/Bag, 1.5K Reel/Tape
FRVL090-120F	: 300 Pcs/Bag, 2.0K Reel/Tape
FRVL100-120F~FRVL110-120F	: 300 Pcs/Bag, 1.5K Reel/Tape
FRVL125-120F~FRVL135-120F	: 200 Pcs/Bag, 1.0K Reel/Tape
FRVL160-120F	: 200 Pcs/Bag
FRVL185-120F~FRVL375-120F	: 100 Pcs/Bag

- Warning :**
- Each product should be carefully evaluated and tested for their suitability of application.
 - Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
 - Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
 - Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRV Series

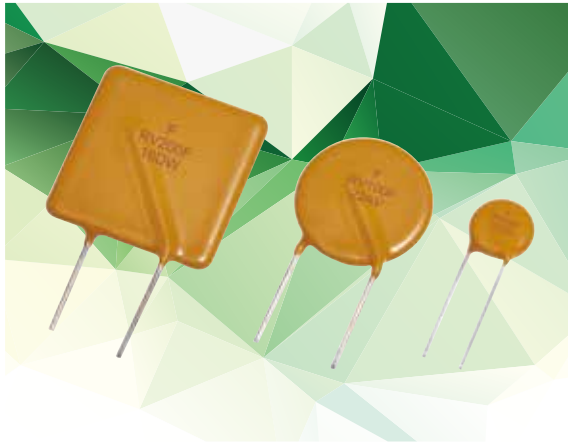

Application

Line Voltage Power Supply, Transformer and Appliances

Product Features

Low hold current, Solid state, Radial leaded product ideal for up to 265V_{AC/DC}



Maximum Operation Current

0.05A~2.00A

Maximum Operating Voltage

240V_{AC/DC}

Maximum Interrupt Voltage

265V_{AC/DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50087018)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Max. Int. Voltage	Typ. Power	Resistance	
								R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , S	I _{MAX} , A	V _{MAX} , V _{AC/DC}	V _{I-MAX} , V _{AC/DC}	P _d , W	Ohms	Ohms
FRV005-240F	0.05	0.12	15.0	1.0	240	265	0.70	18.50	65.00
FRV008-240F	0.08	0.19	15.0	1.2	240	265	0.80	7.40	26.00
FRV012-240F	0.12	0.30	15.0	1.2	240	265	1.00	3.00	12.00
FRV016-240F	0.16	0.37	15.0	2.0	240	265	1.40	2.50	7.80
FRV025-240F	0.25	0.56	18.5	3.5	240	265	1.50	1.30	3.80
FRV033-240F	0.33	0.74	21.0	4.5	240	265	1.70	0.83	2.60
FRV040-240F	0.40	0.90	24.0	5.5	240	265	2.00	0.60	1.90
FRV055-240F	0.55	1.25	26.0	7.0	240	265	3.40	0.45	1.45
FRV075-240F	0.75	1.50	18.0	7.5	240	265	2.60	0.32	0.84
FRV100-240F	1.00	2.00	21.0	10.0	240	265	2.90	0.22	0.58
FRV125-240F	1.25	2.50	23.0	12.5	240	265	3.30	0.17	0.44
FRV150-240F	1.50	3.00	23.0	15.0	240	265	3.70	0.12	0.32
FRV200-240F	2.00	4.00	28.0	20.0	240	265	4.50	0.09	0.22

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	150%	134%	116%	100%	90%	81%	74%	65%	58%	44 %

Typical Time-To-Trip at 23°C

A = FRV005-240F
B = FRV008-240F
C = FRV012-240F
D = FRV016-240F
E = FRV025-240F
F = FRV033-240F
G = FRV040-240F
H = FRV055-240F
I = FRV075-240F
J = FRV100-240F
K = FRV125-240F
L = FRV150-240F
M = FRV200-240F

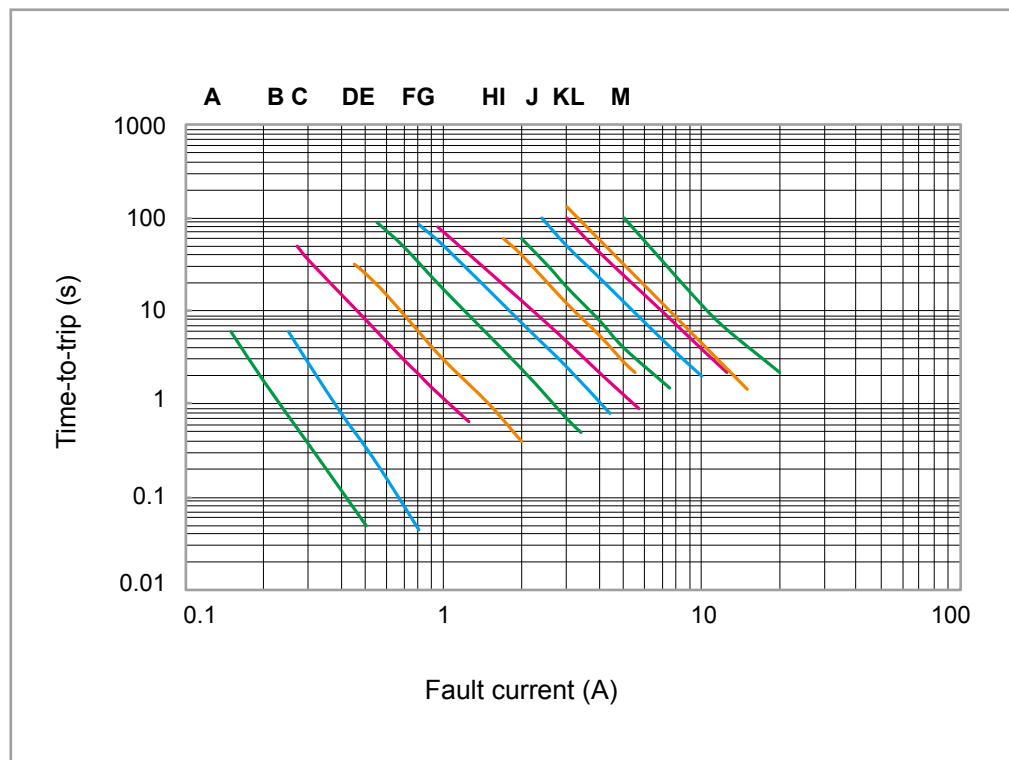

FRV Product Dimensions (mm)




Fig.1

Lead Size : 24AWG
Φ 0.51 mm Diameter




Fig.2

Lead Size : 22AWG
Φ 0.65 mm Diameter




Fig.3

Lead Size : 20AWG
Φ 0.81 mm Diameter




Fig.4

Lead Size : 20AWG
Φ 0.81 mm Diameter

Part Number	Fig	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRV005-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV008-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV012-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV016-240F	1	9.9	12.5	5.1	7.6	3.8	1.6
FRV025-240F	2	9.6	17.4	5.1	7.6	3.8	1.8
FRV033-240F	2	11.4	16.5	5.1	7.6	3.8	1.8
FRV040-240F	2	11.5	19.5	5.1	7.6	3.8	1.8
FRV055-240F	3	14.0	21.7	5.1	7.6	4.1	1.9
FRV075-240F	3	11.5	23.4	5.1	7.6	4.8	1.9
FRV100-240F	4	18.7	24.4	10.2	7.6	5.1	1.9
FRV125-240F	4	21.2	27.4	10.2	7.6	5.3	1.9
FRV150-240F	4	23.4	30.9	10.2	7.6	5.3	1.9
FRV200-240F	3	24.9	33.8	10.2	7.6	6.1	1.9

Physical specifications

Lead material : FRV005-240F~FRV016-240F Tin plated copper, 24AWG.


FRV025-240F~FRV040-240F Tin plated copper, 22AWG.

FRV055-240F~FRV200-240F Tin plated copper, 20AWG.


Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.


Part Numbering System

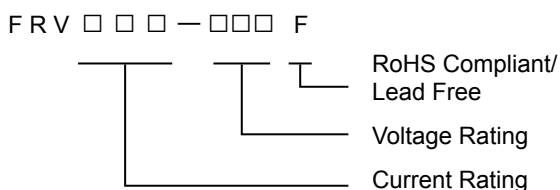

Part Marking System



Example

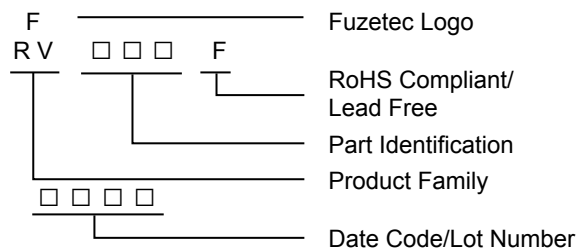

Package Information

Part Number	Standard Package
FRV005-240F~FRV016-240F	: 500 Pcs/Bag, 2.0K Reel/Tape
FRV025-240F	: 300 Pcs/Bag, 2.0K Reel/Tape
FRV033-240F~FRV040-240F	: 200 Pcs/Bag, 2.0K Reel/Tape
FRV055-240F	: 200 Pcs/Bag, 1.0K Reel/Tape
FRV075-240F	: 200 Pcs/Bag
FRV100-240F~FRV200-240F	: 100 Pcs/Bag

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.